

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

This Page Blank (uspto)

(12) UK Patent Application (19) GB (11) 2 308 746 (13) A

(43) Date of A Publication 02.07.1997

(21) Application No 9626369.4
 (22) Date of Filing 19.12.1996
 (30) Priority Data
 (31) 07344257 (32) 28.12.1995 (33) JP

(71) Applicant(s)
 NEC Corporation
 (Incorporated in Japan)
 7-1, Shiba 5-Chome, Minato-Ku, Tokyo, Japan

(72) Inventor(s)
 Ryoh Itoh

(74) Agent and/or Address for Service
 John Orchard & Co
 Staple Inn Buildings North, High Holborn, LONDON,
 WC1V 7PZ, United Kingdom

(51) INT CL⁶
 H01Q 1/24 9/30, H04B 1/38

(52) UK CL (Edition O)
 H1Q QHC

(56) Documents Cited
 GB 2296803 A GB 2213998 A EP 0688060 A1
 US 5446469 A

(58) Field of Search
 UK CL (Edition O) H1Q QHC QHX QKC
 INT CL⁶ H01Q 1/08 1/10 1/22 1/24 9/30, H04B 1/38
 Online: WPI

(54) Portable radio device antenna apparatus

(57) A portable radio device antenna apparatus has a retractable antenna element (20) mounted on the casing (10) of a radio device. The antenna element includes a straight element (21) having an electrical length of $\lambda/2$ and a helical coil (22) having an electrical length of $\lambda/4$ and attached to the upper end of the straight element. The casing contains an impedance matching circuit (11) having a pair of terminals (A, B) and serving to perform impedance matching of the straight element. When the straight element is pulled out from the casing, a feeding metal piece (14) connected to a radio circuit (15) and an inner connection metal piece (13) connected to one terminal (B) of the impedance matching circuit are simultaneously connected to a metal fixture (26) of the antenna element, and an outer connection metal piece (12) connected to the other terminal (A) of the impedance matching circuit is brought into contact with the straight element (21). When the straight element is retracted (Fig 1B, not shown), the feeding metal piece (14) is brought into contact with a metal fixture (27) connected to the helical coil, and the inner and outer connection metal pieces (13, 12) are respectively brought into contact with an insulator (23) between the straight element and the helical coil and a protective cover (28) which covers the helical coil, such that the radio circuit (15) is connected to the coil only.

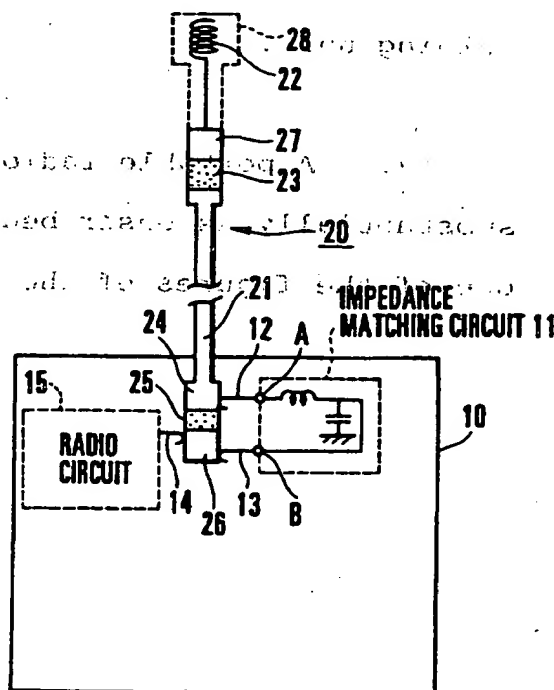


FIG. 1A

GB 2 308 746 A

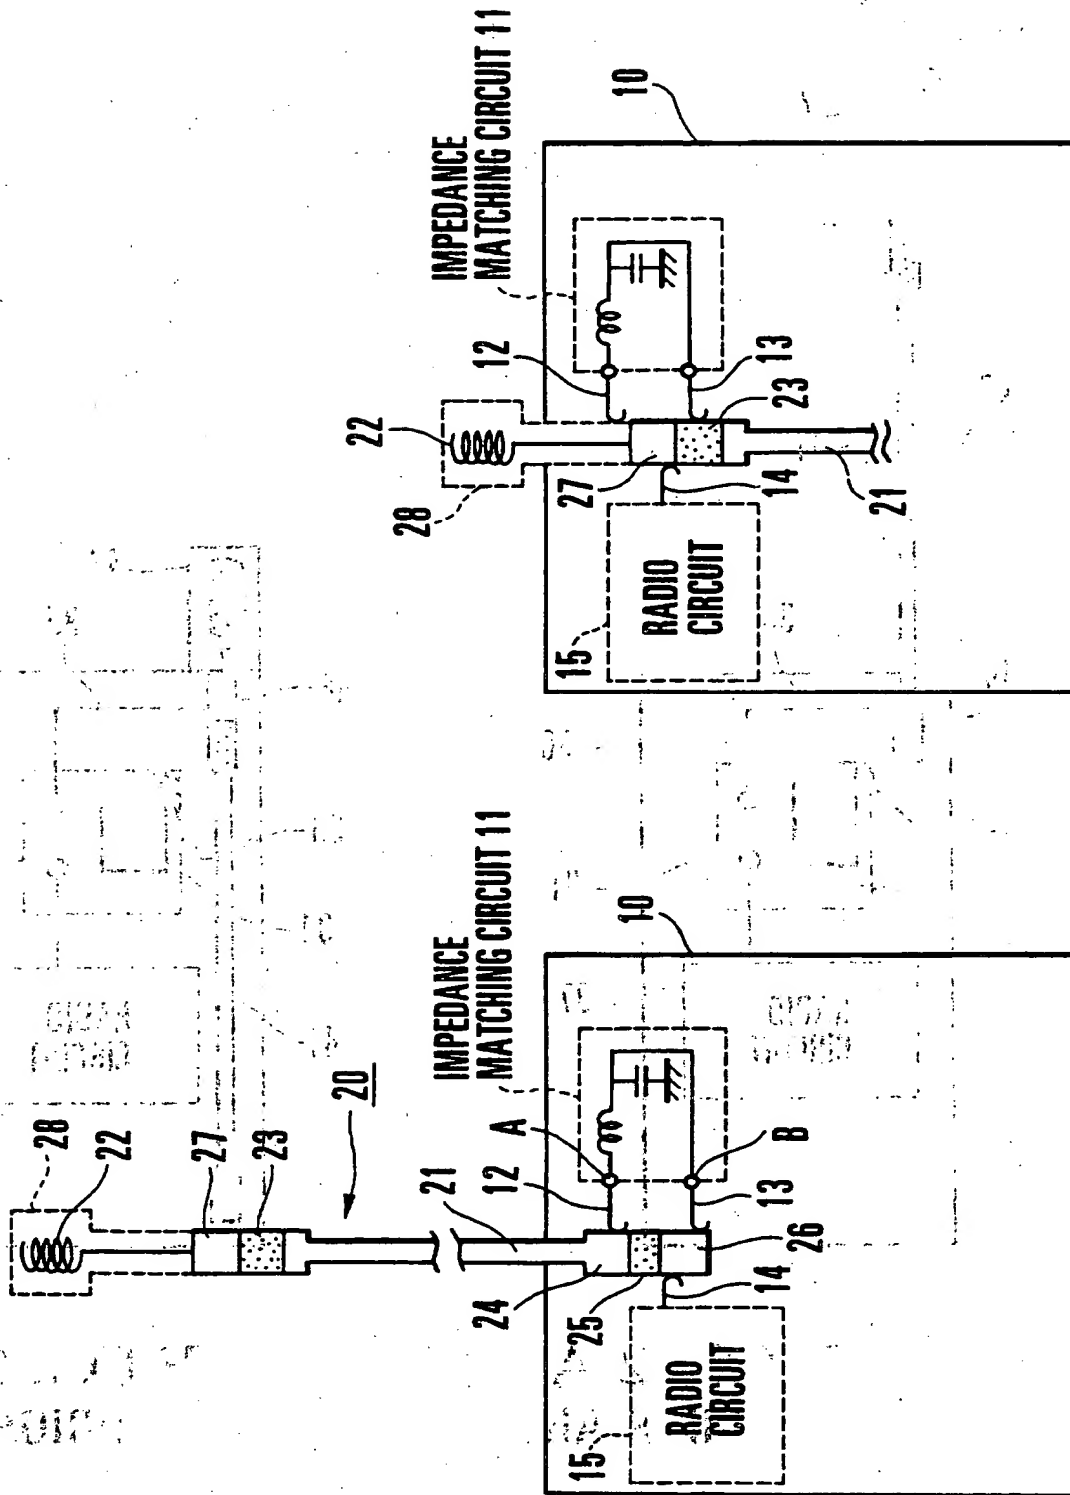
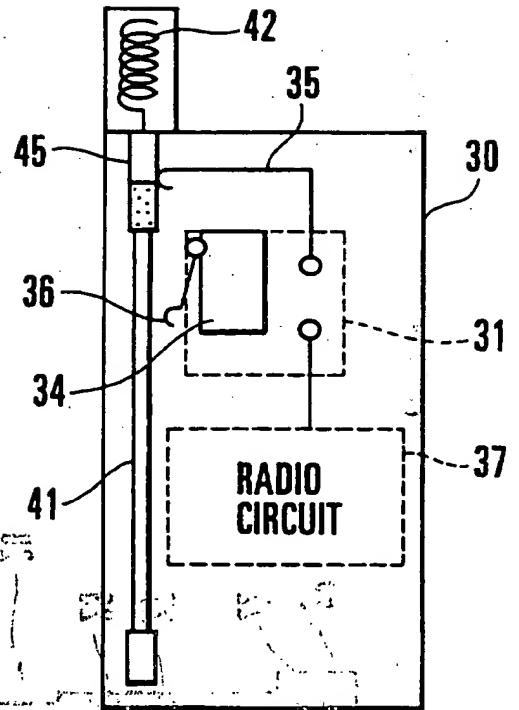
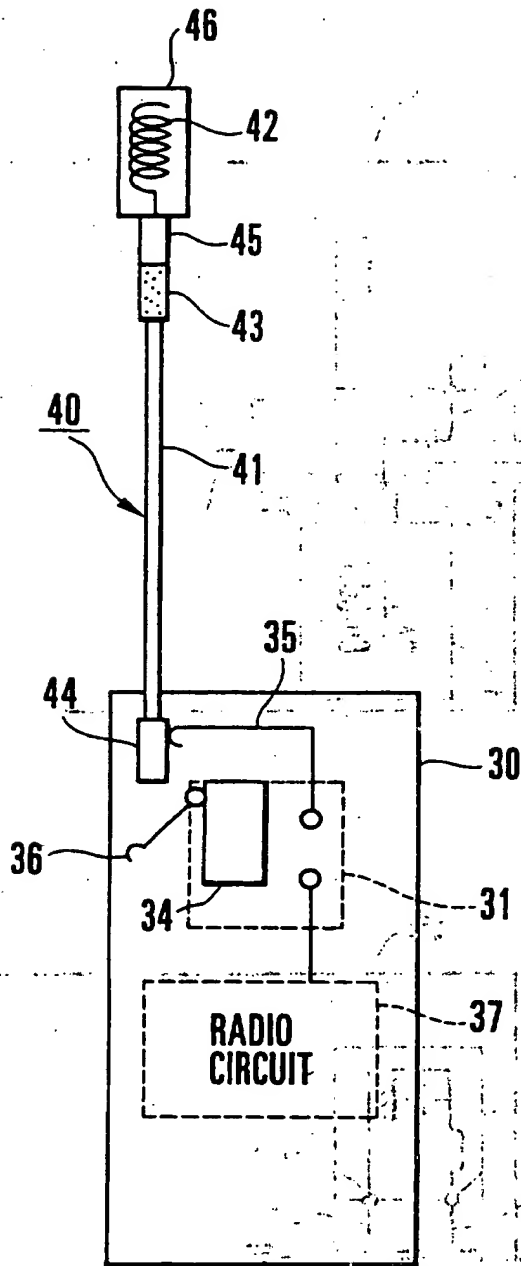


FIG. 1B

FIG. 1A



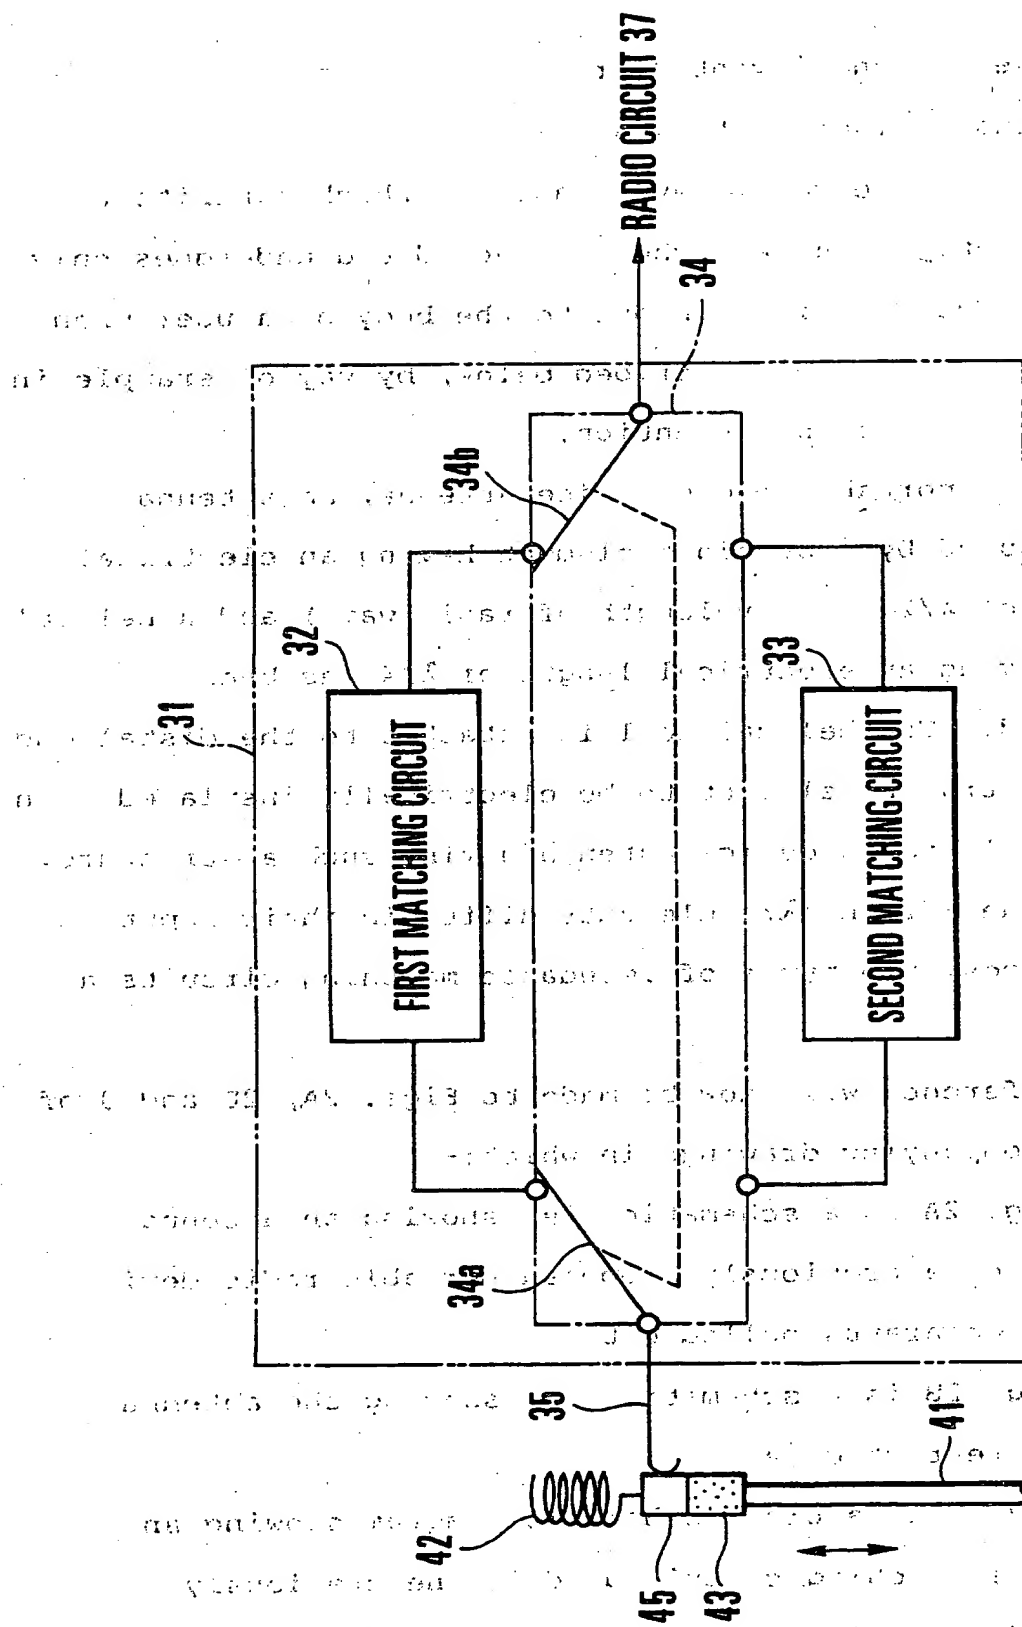


FIG. 3
PRIOR ART

PORTABLE RADIO DEVICE ANTENNA APPARATUS

The present invention relates to an antenna apparatus having a retractable antenna.

A portable radio device antenna which exhibits a sufficiently high gain when retracted and undergoes only a small decrease in gain due to the body of a user when pulled out, will be described below, by way of example in illustration of the invention.

As a portable radio device antenna, an antenna constituted by a straight element having an electrical length of $\lambda/2$ (λ : wavelength of radio wave) and a helical coil having an electrical length of $\lambda/4$ has been proposed. The helical coil is attached to the distal end of the straight element to be electrically insulated. In a portable radio device antenna having such a structure, since the $\lambda/2$ and $\lambda/4$ elements differ in their input impedances, two types of impedance matching circuits are required.

Reference will now be made to Figs. 2A, 2B and 3 of the accompanying drawings in which:-

Fig. 2A is a schematic view showing an antenna element of a previously proposed portable radio device antenna apparatus pulled out,

Fig. 2B is a schematic view showing the antenna element retracted, and

Fig. 3 is a block schematic diagram showing an impedance matching circuit used in the previously proposed portable radio device antenna apparatus shown in

Figs. 2A and 2B.

As shown in Figs. 2A, 2B, and 3, of the accompanying drawings a previously proposed antenna apparatus has a mechanical two-way switch to switch impedance matching circuits depending on whether the antenna is pulled out or retracted. With this structure, two types of impedance matching circuit are switched. That is, as shown in Figs. 2A and 2B, a retractable antenna element 40 is retracted in a casing 30 of a radio device, and an impedance matching circuit 31 is arranged in the casing 30.

As shown in Fig. 3, this impedance matching circuit 31 includes a first matching circuit 32 which operates when the antenna is retracted, a second matching circuit 33 which operates when the antenna is pulled out, and a switch 34 having two-way movable contacts 34a and 34b for switching the first and second matching circuits 32 and 33. A conductive connection metal piece 35 is connected to one terminal of the impedance matching circuit 31, and a radio circuit 37 is connected to the other terminal of the impedance matching circuit 31. The switch 34 has an actuator 36 which operates when an antenna element 40 is retracted in the casing 30.

The antenna element 40 is constituted by a straight element 41 and a helical coil 42 which are coupled to each other through an insulator 43. A conductive connection metal fixture 44 is attached to the lower end of the straight element 41. A conductive connection

metal fixture 45 is attached to the lower end of the helical coil 42. A protective cover 46 covers the helical coil 42.

As shown in Fig. 2A, in this portable radio device antenna, when the antenna element 40 is pulled out from the casing 30, the actuator 36 of the switch 34 is set in a non-contact state, and the movable contacts 34a and 34b are connected to the second matching circuit 33. When the antenna element 40 is retracted in the casing 30, the straight element 41 operates the actuator 36 of the switch 34 to switch the switch 34 so as to connect the movable contacts 34a and 34b to the first matching circuit 32.

However, since the above previously proposed portable radio device antenna uses the mechanical switch having the two movable contacts, the casing 30 needs to have a large volume. A reduction in size of the portable radio device cannot therefore be attained.

Although the present applicant has proposed a portable radio device antenna in Japanese Patent Laid-Open No. 6-232614, this proposed portable radio device antenna has no impedance matching circuit. Other techniques associated with antennas have been disclosed in Japanese Patent Laid-Open Nos. 4-196907, 54-52450, 2-19004, and 64-90604.

Features of a portable radio device antenna apparatus to be described below as examples in illustration of the invention are that it serves as a

straight element having an electrical length of $\lambda/2$, exhibits a sufficiently high gain as a helical coil having an electrical length of $\lambda/4$, and enables a portable radio device antenna apparatus of a reduced size to be provided.

In a particular embodiment to be described below, by way of example in illustration of the present invention, a portable radio device antenna apparatus includes a casing of a radio device and a retractable antenna element mounted on the casing, the antenna element having a rod-like, conductive, straight element with an electrical length of $\lambda/2$, a helical coil with an electrical length of $\lambda/4$ and attached to an outer end of the straight element, an insulator for insulating the straight element from the helical coil, a short-circuit metal fixture mounted on an inner end of the straight element and insulated therefrom, a first contact metal fixture mounted on an inner end of the helical coil and electrically connected to the helical coil, and an insulating protective cover covering the helical coil, the casing including an impedance matching circuit having a pair of terminals and serving to provide impedance matching of the straight element, outer and inner connection metal pieces connected respectively to a pair of terminals of the impedance matching circuit, and a feeding metal piece connected to a radio circuit for transmitting/receiving a radio signal, wherein when the straight element is pulled out from the casing, the

feeding metal piece and the inner connection metal piece are simultaneously connected to the short-circuit metal fixture, and the outer connection metal piece is brought into contact with the straight element, and when the straight element is retracted in the casing, the feeding metal piece is brought into contact with the first contact metal fixture, and the inner and outer connection metal pieces are respectively brought into contact with the insulator and the protective cover.

10 An arrangement, illustrative of the invention, will now be described, by way of example, with reference to the accompanying drawings, in which:-

Fig. 1A is a schematic view showing an antenna element of a portable radio device antenna apparatus pulled out of the apparatus, and Fig. 1B is a schematic view showing the antenna element retracted into the apparatus.

Referring to Fig. 1A, reference numeral 10 denotes the casing of a portable radio device on which a retractable antenna element 20 is mounted. This antenna element 20 includes a rod-like, conductive, straight element 21 having an electrical length of $\lambda/2$ and a helical coil 22 mounted on the outer end of the straight element 21, incorporating a conductive material, and having an electrical length of $\lambda/4$. The straight element 21 is electrically disconnected from the helical coil 22 as a result of the presence of an insulator 23.

A contact metal fixture 24 is attached to the inner

portion of the straight element 21 and in contact therewith. The contact metal fixture 24 is electrically connected to the straight element 21. A short-circuit metal fixture 26 is mounted on the inner end of the contact metal fixture 24 by means of an insulator 25.

A contact metal fixture 27 is attached to the inner end of the helical coil 22 and in contact therewith. The contact metal fixture 27 is electrically connected to the helical coil 22. The contact metal fixture 27 is mounted on the outer end of the insulator 23 interposed between the straight element 21 and the helical coil 22. The straight element 21 and the contact metal fixture 27 are electrically insulated from each other by the insulator 23. Reference numeral 28 denotes a cap-like protective cover made of a synthetic resin and covering the helical coil 22.

Reference numeral 11 denotes an impedance matching circuit arranged in the casing 10. Connection metal pieces 12 and 13, each made of a conductive metal in the form of a leaf spring, are connected respectively to terminals A and B of the impedance matching circuit 11.

The connection metal pieces 12 and 13 are arranged side by side in the axial direction of the antenna element 20. The connection metal piece 12, on the outer side is brought into contact with the antenna element 20.

Reference numeral 14 denotes a feeding metal piece made of a conductive metal in the form of a leaf spring and electrically connected to a radio circuit 15. The

feeding metal piece 14 is placed at a middle position between the connection metal pieces 12 and 13, to be in contact with the antenna element 20.

The impedance matching circuit 11, the connection metal pieces 12 and 13, and the feeding metal piece 14 are fixed inside the casing 10. The inner or lower portion of the protective cover 28, the contact metal fixture 27, the insulator 23, the contact metal fixture 24, the insulator 25, and the short-circuit metal fixture 26 have columnar shapes with the same diameter, which is larger than the diameter of the straight element 21.

The situation when the antenna element 20 is pulled out from the casing 10 will be described next with reference to Fig. 1A. While the antenna element 20 is pulled out from the casing 10, the feeding metal piece 14 is connected to the radio circuit 15 is in contact with the short-circuit metal fixture 26. At the same time, the connection metal piece 13 is brought into contact with the short-circuit metal fixture 26. The short-circuit metal fixture 26 is connected to the impedance matching circuit 11 through the connection metal piece 13 and the terminal B. The impedance matching circuit 11 is connected to the contact metal fixture 24 of the straight element 21 through the terminal A and the connection metal piece 12. As a result, power is supplied from the radio circuit 15 to the straight element 21 through the short-circuit metal fixture 26, the impedance matching circuit 11, and the contact metal fixture 24.

At this time, the helical coil 22 is electrically insulated from the straight element 21 by the insulator 23 so only the straight element 21 operates as an antenna. Therefore, the antenna element 20 operates as
 5 whip antenna consisting of the straight element having an electrical length of $\lambda/2$, but it is not influenced by the helical coil 22.

The situation when the antenna element 20 is retracted into the casing 10 will be described below with
 10 reference to Fig. 1B. While the antenna element 20 is retracted into the casing 10, the feeding metal piece 14 connected to the radio circuit 15 is connected to the contact metal fixture 27 connected to the helical coil 22. Since the connection metal piece 12 is brought into
 15 contact with the outer surface of the protective cover 28, the terminal A of the impedance matching circuit 11 is electrically insulated from the helical coil 22. Since the connection metal piece 13 is brought into contact with the insulator 23, the terminal B of the
 20 impedance matching circuit 11 is electrically insulated from both the helical coil 22 and the straight element 21. At this time, since the straight element 21 and the helical coil 22 are electrically insulated from each other by the insulator 23, only the helical coil 22
 25 operates as an antenna.

In this situation, power is supplied from the radio circuit 15 to the helical coil 22 through the feeding metal piece 14 and the contact metal fixture 27. Note

that since the helical coil 22 has an impedance of about 50 Ω , no impedance matching circuit is required. In addition, since the contact metal fixtures 24 and 27 and the short-circuit metal fixture 26 have the same diameter, no contact failure occurs with respect to the connection metal pieces 12 and 13 and the feeding metal piece 14.

With the portable radio device antenna described above, switching/power feeding of/for the straight element having an electrical length of $\lambda/2$ and the helical coil having an electrical length of $\lambda/4$ can be performed with a simple structure without using any mechanical switch, thereby realizing a reduction in size of a portable radio device.

It will be understood that, although a particular embodiment, illustrative of the invention has been described by way of example, variations and modifications thereof, as well as other embodiments may be made within the scope of the appended claims.

CLAIMS

1. A portable radio device antenna apparatus including a casing for the radio device and a retractable antenna element mounted on the casing, the antenna element having a rod-like, conductive, straight element with an electrical length of $\lambda/2$ (λ : wavelength of radio wave), a helical coil having an electrical length of $\lambda/4$ and being attached to the outer end of the straight element, an insulator for insulating the straight element from the helical coil, a short-circuit metal fixture mounted on the inner end of the straight element and insulated therefrom, a first contact metal fixture mounted on the inner end of the helical coil and electrically connected to the helical coil, and an insulating protective cover covering the helical coil, and the casing having an impedance matching circuit with a pair of terminals and serving to match the impedance of the straight element, outer and inner connection metal pieces connected respectively to the pair of terminals of the impedance matching circuit, and a feeding metal piece connected to a radio circuit for transmitting/receiving a radio signal, wherein when the straight element is pulled out from the casing, the feeding metal piece and the inner connection metal piece are simultaneously connected to the short-circuit metal fixture, and the outer connection metal piece is brought into contact with the straight element, and when the straight element is

retracted into the casing, the feeding metal piece is brought into contact with the first contact metal fixture, and the inner and outer connection metal pieces are respectively brought into contact with the insulator and the protective cover.

2. An apparatus as claimed in claim 1, wherein each of the outer and inner connection metal piece and the feeding metal piece is made of a conductive metal in the form of a leaf spring.

3. An apparatus as claimed in claim 2, wherein the antenna element includes a second contact metal fixture which is mounted on the inner end of the straight element and electrically connected to the straight element, and with which the outer connection metal piece is brought into contact.

4. An apparatus as claimed in claim 3, wherein the first and second contact metal fixtures and the short-circuit metal fixture have the same diameter, which is larger than the diameter of the straight element.

5. An apparatus as claimed in claim 1, wherein the feeding metal piece is placed at a middle position between the outer and inner connection metal pieces.

6. An apparatus as claimed in claim 1, wherein

when the antenna element is pulled out from the casing, power is supplied from the radio circuit to the straight element through the feeding metal piece, the short-circuit metal fixture, the inner connection metal fixture, the impedance matching circuit, and the outer connection metal fixture.

7. An apparatus as claimed in claim 1, wherein when the antenna element is retracted into the casing, power is supplied from the radio circuit to the helical coil through the feeding metal piece and the first contact metal piece.

8. An apparatus as claimed in claim 1 substantially as described herein with reference to Figs. 1A and 1B of the accompanying drawings.



The Patent Office

13

Application No: GB 9626369.4
Claims searched: 1-8

Examiner: Steven Davies
Date of search: 11 March 1997

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK CI (Ed.O): H1Q-QHC, QHX, QKC
Int CI (Ed.6): H01Q-1/08, 1/10, 1/22, 1/24, 9/30 ; H04B-1/38
Other: Online WPI

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A,P	GB 2296603 A (NOKIA)	
A	GB 2213998 A (TECHNOPHONE)	
A	EP 0688060 A1 (GALTRONICS)	
A	US 5446469 (MAKINO)	

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.

5. 10. 1977

1. 10. 1977
2. 10. 1977
3. 10. 1977

4. 10. 1977
5. 10. 1977

6. 10. 1977
7. 10. 1977
8. 10. 1977
9. 10. 1977
10. 10. 1977

11. 10. 1977
12. 10. 1977

13. 10. 1977
14. 10. 1977

This Page Blank (uspto)



15. 10. 1977
16. 10. 1977
17. 10. 1977
18. 10. 1977
19. 10. 1977
20. 10. 1977
21. 10. 1977
22. 10. 1977
23. 10. 1977
24. 10. 1977
25. 10. 1977
26. 10. 1977
27. 10. 1977
28. 10. 1977
29. 10. 1977
30. 10. 1977
31. 10. 1977
32. 10. 1977
33. 10. 1977
34. 10. 1977
35. 10. 1977
36. 10. 1977
37. 10. 1977
38. 10. 1977
39. 10. 1977
40. 10. 1977
41. 10. 1977
42. 10. 1977
43. 10. 1977
44. 10. 1977
45. 10. 1977
46. 10. 1977
47. 10. 1977
48. 10. 1977
49. 10. 1977
50. 10. 1977
51. 10. 1977
52. 10. 1977
53. 10. 1977
54. 10. 1977
55. 10. 1977
56. 10. 1977
57. 10. 1977
58. 10. 1977
59. 10. 1977
60. 10. 1977
61. 10. 1977
62. 10. 1977
63. 10. 1977
64. 10. 1977
65. 10. 1977
66. 10. 1977
67. 10. 1977
68. 10. 1977
69. 10. 1977
70. 10. 1977
71. 10. 1977
72. 10. 1977
73. 10. 1977
74. 10. 1977
75. 10. 1977
76. 10. 1977
77. 10. 1977
78. 10. 1977
79. 10. 1977
80. 10. 1977
81. 10. 1977
82. 10. 1977
83. 10. 1977
84. 10. 1977
85. 10. 1977
86. 10. 1977
87. 10. 1977
88. 10. 1977
89. 10. 1977
90. 10. 1977
91. 10. 1977
92. 10. 1977
93. 10. 1977
94. 10. 1977
95. 10. 1977
96. 10. 1977
97. 10. 1977
98. 10. 1977
99. 10. 1977
100. 10. 1977